
LASER SAFETY

The use of lasers in the medical field is increasing at a tremendous rate.

•As laser treatment increases the potential for laser accidents also increases.



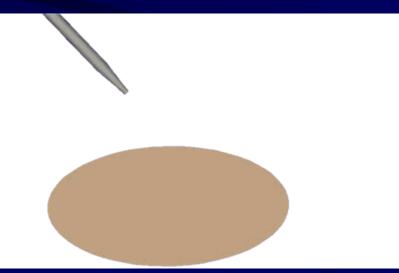

LASER SAFETY

The Joint Commission EC.02.02.01

 The hospital minimizes risks associated with selecting and using hazardous energy sources.

 This includes ionizing (radiation and xray equipment) and non-ionizing equipment (LASER's and MRI's)

Possible TRACER during survey.



LASERS IN MEDICINE

- Surgery (photothermal energy)
- Lithotripsy (photoacoustical energy)
- Tattoo Removal (photothermal energy)
- Hair Removal (photothermal energy)
- Photodynamic therapy (photochemical energy)



SV

UNDERSTANDING LASER SAFETY

To understand laser safety the following questions need to be answered:

What is a laser?

What are the potential hazards?

How can these hazards be prevented?



-

WHAT IS A LASER?

L ight A mplification by S timulated E mission of Radiation



₩

LASER BASICS

Laser light differs from ordinary light in
3 ways:

- 1. Monochromatic light that is one color or a single wavelength.
- 2. Directional traveling in one direction from point of origin.
- 3. Coherent orderliness of wave patterns by being in phase in time and space
 These three properties allow a laser to focus a lot of energy onto a small area.



LASER BASICS

4/2

7

There are three absorbers of light in tissue
Water, Hemoglobin, Melanin

 Water Absorption (i.e. CO2 LASER used for soft tissue; cells expand when heating occurs)

Water Transmission (i.e. Diode LASER, KTP Green Light LASER)

•Knowing the absorption/transmission is important in determining the hazards and hazard controls.

BEAM RELATED HAZARDS

Hazardous effects related to unintentional direct contact with the laser beam


-Eye related -Interaction hazards (Plume and Fire)

-Skin related



1/1


EYE RELATED HAZARDS

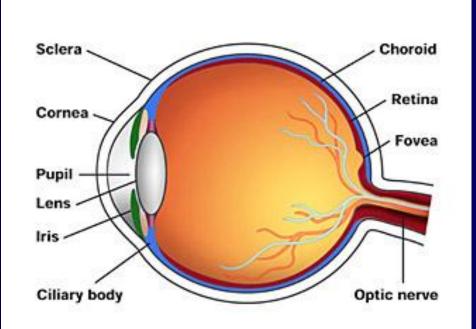

Corneal/Sclera Injury: caused by wavelengths that do not pass through fluid (roughly above 1400 nm and below 400 nm)

Retinal Burns Injury: caused by wavelengths that do pass through fluid from (roughly 400-1400nm)



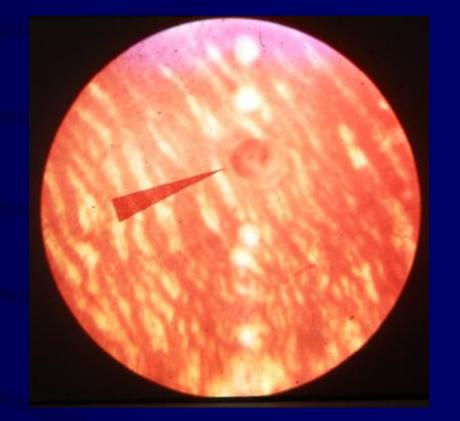

Corneal injury from CO2 laser

Retinal injury from a dye laser



EYE RELATED HAZARDS

1/2


7

Injury can result from exposure to:
direct beam
mirror reflection (surgical instruments)
diffuse beam (tissue reflection)

Damage dependent on:

intensity - lens of eye can focus beam onto the retina
wavelength - absorbed by different parts of the eye
duration - fraction of second, before you can blink

Direct Beam

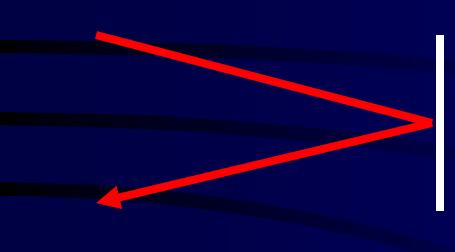

Reflected Beam

Diffuse Beam



INTERACTION HAZARDS Plume

- Plume - smoke from vaporization

- Creates a visibility problem
- Can cause nausea
- Potential health hazard



4/2

7

INTERACTION HAZARDS Plume

What is the plume?

- Carbon

- Aerosolized blood

- Bacteria

- Viral particulates

-Gases – including benzene, toluene and formaldehyde



SV/

7

INTERACTION HAZARDS Plume

plume particle size - 0.1 microns standard surgical mask particle filtration efficiency: - 5 microns - 99% - 0.3 micron - 25% - double mask - 30% Do not rely on the surgical mask for filtration. The use of a smoke evacuator is the preferred control method.



\$1/-

FIRE AND EXPLOSION

Can occur if the laser beam comes into contact with combustible or volatile materials, such as:

- gauge pads
- surgical drapes
- gowns
- alcohol
- anesthetic gases
- plastic trach tubes
- rectal gases



1/2

7

SKIN RELATED



- Thermal burn
- Laser effects on tissue are dependent on 4 factors:
 - power density of laser beam
 - wavelength
 - duration of exposure
 - effects of circulation and conduction



NON-BEAM RELATED HAZARDS

Hazards associated with the generation of the laser beam Electrical •High voltage – many lasers require high voltage to generate the laser beam. •Accidental exposure can result in electrical shock or death Chemical Dye lasers use hazardous dyes to generate the laser beam (hazardous waste)



CONTROL MEASURES

There are 3 basic control measures:

- Engineering
- Administrative
- Personal protection



₩

ENGINEERING

These are control measures that are built into the laser system, such as:

 enclosing the electrical system, within a cabinet

 enclosing the beam within fiber optics or mechanical arms



1/2

ADMINISTRATIVE CONTROLS

- Controlled entry
- Education
- Standards



CONTROLLED ENTRY


1/2

Closing doors and covering windows (when 'required)
Posting of the PROPER "Laser in Use" signs outside all entries.

ADANGER

<image><image><text><text><text><text><text><text><text>

EDUCATION

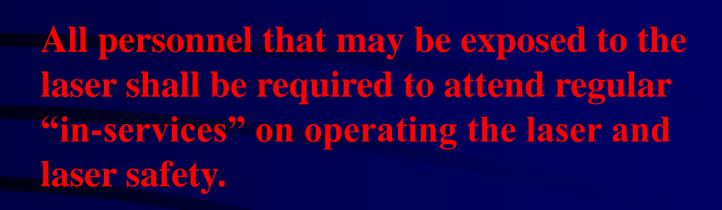



₩

STANDARDS


Each medical facility should develop their own set of operating standards.
American National Standards For The Safe Use Of Lasers
American National Standards For The Safe Use Of Lasers In The Health Care Facility



1/2

Institutional Procedures & Policies


- Laser Systems (HM-08-002)
- UT Laser Safety Manual (HM-08-002 Appendix A)
- Operating Room LASER Operation, Safety and Procedures (3364-124-56 through 3364-124-62). Policies are in the process of being combined.



- LASER team members will attend yearly LASER safety in-services.
- LASER questions have been added to the safety test bank.
- Qualified LASER team members will function independently of the circulating nurse.




- LASER Staff Member will:
 - Post LASER signs
 - Provide PPE for patient and staff and monitor use during the procedure.
 - Calibrate and test fire the LASER pre-operatively when required.
 - Monitor policies/procedures.
 - Complete the LASER Checklist.
 - Report any incidents to the OR Nurse and UT LSO.



Eye Protection

- Ensure the patients eyes are protected (see policy).
- All personnel in the room must wear eye protection.
- Endoscopic lens covers with special filters can be used during microscope procedures to provide protection.
- LASER safety glasses must be made available on the door of the room.
- COVER windows when required.




 LASER Generated Air Contaminants (LGAC's)

 LASER must not be activated until the smoke evacuator is positioned near the tissue interaction site and is operating.



Foot Pedal

- Must be operated by the surgeon.
- Will not be placed near any liquids to minimize electrical hazards.
- Must be inspected for fraying or breaks in the cords.
- Must be identified verbally by the LASER team member when placing it for use.
- Other foot pedals will also be verbally identified to avoid confusion.



Fire Safety

- Use wet draping around the intended LASER site to reduce possible ignition.
- A basin of 1000ml of saline must be readily available.
- During a LASER procedure on the lower bowel, the rectum must be packed with a wet radiopaque sponge



- Fire Safety
 - SPECIAL precautions must be taken during trachea procedures to reduce the potential for ET tube fires (special tube and no-explosive gases).
 - Use of non-reflective instruments.
 - NO flammable prep solutions



LASER Operation

- Keys must be removed when not in use.
- LASER will remain off when not in use.
- Surgeon is responsible for setting the LASER settings.
- Only the surgeon or resident under supervision of the surgeon will operate the LASER power activation controls.
- The LASER will be placed in "Standby" mode on verbal command when the surgeon removes his hands or eyes from the field or LASER equipment.



LASER Instrumentation

- Ensure proper instrumentation for the procedure to reduce the potential for melting, reflection, fire, plume.
- Instruments can be covered with wet towels or sponges to decrease the chance of LASER reflection.
- Stainless steel mirrors used to reflect the LASER beam must be inspected regularly.



Procedure #HM-08-002 – Laser Systems

- All Departments/Divisions must have policies & procedures addressing safety precautions for personnel
- Medical staff shall be credentialed (written record)







- Barriers
- Fire protection
- Smoke evacuation & filtration






Eyewear

 Each laser requires specific eyewear that is capable of absorbing laser light of that specific wavelength





Everyone in the laser OR must wear eye protection including the patient

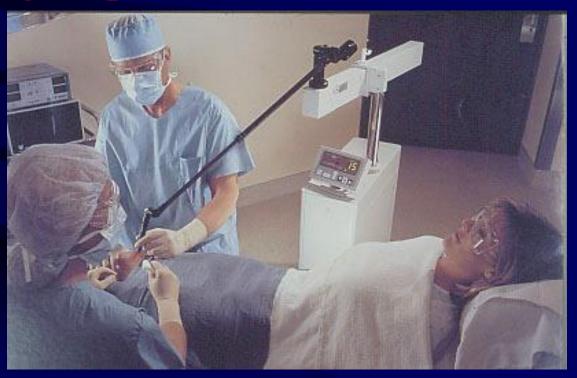



₩

Patient – the patient's eye's can be protected by:
 covering with moist towels


- goggles
- intra-ocular shields





¥/

The surgeon must have eye protection, even during microscopic and endoscopic procedures.
Lens filters that fit over the eyepiece can be used

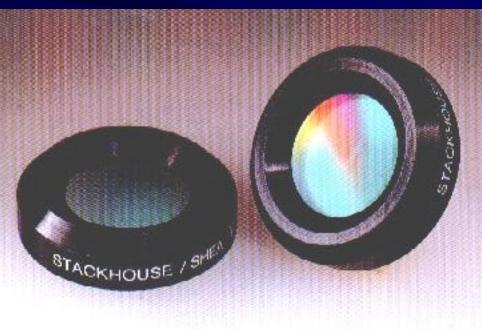



\$/_

SKIN PROTECTION



- Clothing
- Gloves
- Fire resistant gowns
- Fire resistant surgical drapes
- Moist gauze and drapes around surgical area



₩

SKIN PROTECTION



Clothing

Offers some protection from skin exposure to laser beams, unfortunately most OR's use flammable gowns and drapes thus increasing the potential for fire hazards

 all gauze and drapes around the surgical area should be moistened with sterile saline.




SMOKE EVACUATION & FILTRATION

Commercially available smoke evacuators filter out the smallest particles (0.1 μ) found in the laser plume

 to be completely effective the smoke evacuator suction tube must be placed as near to the site of laser ablation as possible (less than 2 cm)






SMOKE EVACUATION & FILTRATION

Filtration

-HEPA (high efficiency particulate air) Filter -99.99% efficient at filtering 0.3 micron particles -Bacterial filter

-ULPA (ultra-low penetration) Filter -99.999% efficient at filtering 0.12 micron particles -Viral filter



LASER BASICS – UTMC LASERS

CO2 LASER

•10,600 nm (IRC)

•Hazards

Eye Hazards (Corneal)
Skin Hazards (Skin Burns)
Electrical Hazards
Fire Hazards
LGAC's (LASER Generated Air Contaminants)

•Controls

- LASER Safety Glasses
- •Smoke Evacuator
- •Policy/Procedures
- •Nominal Hazard Zone: Entire Room





Holmium:YAG LASER

•2,100 nm (IRB)

•Hazards

- Eye Hazards (Corneal)
 Skin Hazards (Skin Burns)
 Electrical Hazards
 Fire Hazards
 Controls
 LASER Safety Glasses
 - Policy/Procedures
 - •Nominal Hazard Zone: Entire Room



Urology





Diode LASER (Precision 980)

•980 nm (IRA)

•Hazards

- •Eye Hazards (Cataract and Retinal Burn)
- •Skin Hazards (Skin Burn)
- •Electrical Hazards
- •Fire Hazards

•Controls

- •LASER Safety Glasses
- •Window Covers
- •Policy/Procedures
- •Nominal Hazard Zone: Entire Room





XeCl LASER

•308nm (UVB)

•Hazards

•Eye Hazards (Simultaneous Cornea, Lens, Retina effects observed)
•Skin Hazards (Increased Pigmentation)
•Electrical Hazards
•Fire Hazards

•Controls

•LASER Safety Glasses•Policy/Procedures•Nominal Hazard Zone: Entire Room





KTP Green Light LASER

•532 nm (UVB)

•Hazards

- •Eye Hazards (Retinal Burn) •Skin Hazards •Electrical Hazards •Fire Hazards •Plume (Minimal) •Controls
 - LASER Safety Glasses
 Policy/Procedures
 Nominal Hazard Zone: Entire Room
 Window Covers (Currently used in a room without windows).



